


## DS-7600NI-I2/P Series NVR



### Specifications

| Model                                  |                                 | DS-7608NI-I2/8P  | DS-7616NI-I2/16P                                       |
|--|---------------------------------|--|--|
| Video/Audio input                      | IP video input                  | 8-ch   | 16-ch  |
|  |                                 | Up to 12 MP resolution   |  |
|  | Two-way audio                   | 1-ch, RCA (2.0 Vp-p, 1kΩ)  |  |
| Network                                | Incoming bandwidth              | 80 Mbps  | 160 Mbps   |
|  | Outgoing bandwidth              | 256 Mbps   |  |
|  | Remote connection               | 128  |  |
| Video/Audio output                     | Recording resolution            | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF /CIF/QCIF  |  |
|  | HDMI output resolution          | 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |  |
|  | VGA output resolution           | 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz  |  |
|  | Audio output                    | 1-ch, RCA (Linear, 1 KΩ)   |  |
| Decoding                               | Decoding format                 | H.265/H.264/H.264+/MPEG4   |  |
|  | Live view / Playback resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF /CIF/QCIF  |  |
|  | Synchronous playback            | 8-ch   | 16-ch  |
|  | Capability                      | 4-ch @ 4K, or 16-ch @ 1080p  |  |
| Hard disk                              | SATA                            | 2 SATA interfaces for 2HDDs  |  |
|  | Capacity                        | Up to 6TB capacity for each HDD  |  |
| External interface                     | Network interface               | 1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface  |  |
|  | USB interface                   | Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0  |  |
|  | Alarm in/out                    | 4/1  |  |
| POE Interface (for /P series NVR only) | Interface                       | 8 RJ-45 10/100 Mbps self-adaptive Ethernet interfaces  | 16 RJ-45 10/100 Mbps self-adaptive Ethernet interfaces |
|  | Power                           | ≤120W  | ≤200W  |
|  | Supported standard              | IEEE 802.3 af/at   |  |
| General                                | Power supply                    | 100 to 240 VAC, 50 to 60 Hz  |  |
|  | Power                           | ≤180 W   | ≤280 W   |
|  | Consumption (without hard disk) | ≤15 W (without enabling PoE)   |  |
|  | Working temperature             | -10 to +55°C (14 to 131°F)   |  |
|  | Working humidity                | 10 to 90 %   |  |
|  | Chassis                         | 380mm chassis  |  |
|  | Dimensions(W × D × H)           | 380 × 290 × 45mm (15.0" × 11.4" × 1.8")  |  |
|  | Weight(without hard disk)       | ≤ 3 Kg (6.6 lb)  |  |

## DS-2CD4A85F-IZ(H)(S) 4K Smart Bullet Camera

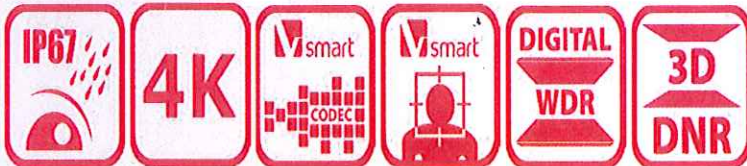

### smart IPC

DS-2CD4A85F-IZ(H)(S) is Hikvision Smart IPC and features complete Smart functions including:

#### **Smart Detection**

Intrusion Detection, Line Crossing Detection, Object Left/Removal, Area Entering/Leaving, Scene Change Detection, Audio Surge Detection, Audio Loss Detection, Defocus Detection, Face Detection, Object Counting, etc.

#### **Smart Codec**

Smart Recording with dual-VCA, Low Bitrate, Low Latency, ROI enhancement, Multi-stream, Rotate Mode, Edge Recording, etc.

#### **Smart Image Control**

Support distortion correction

The 4K series Smart cameras are able to capture super high quality images.

DS-2CD4A85F-IZ(H)(S) offers 8MP HD resolution with up to 22fps frame rate, DWDR, PoE, Defog, 3D DNR and complete Smart Feature-set to meet a wide variety of applications.

- 1/1.7" Progressive Scan CMOS
- 4096 × 2160 @22fps frame rate
- Slow shutter
- DWDR
- 3D DNR
- Up to 50m IR range
- Motorized lens with Smart Focus
- -H: built-in heater
- -S: audio/alarm IO
- Support 128G on-board storage
- DC12V/PoE
- IP67



## Key Features

### Smart

- 6 behavior analysis, 4 exception detections, 1 recognition, 1 statistic function.
- Smart recording: Support edge recording and dual-VCA.
- Smart encoding: Support low bit rate; low latency; ROI enhance encoding
- Smart lens options: AF lens

### Image

- HD 4096 × 2160@22fps
- Supports image distortion correction
- Support rotate mode, suitable for environment as corridor.
- Support regional cropping, details can be seen with low bandwidth.
- Code smoothness setting for different requirements of image quality and fluency.
- Support H.264+/H.264/MJPEG video compression, multi-level video quality configuration; support Basic/Main/High Profile H.264 encoding complexity.
- Multiple OSD color: Black & white self-adaptive; Custom
- Digital WDR is supportable for backlight environment.
- Support defog, BLC, HLC.

### Infrared

- Irradiation distance is up to 50m
- IR anti-reflection panel, increase infrared light transmittance.
- Smart IR, prevent over-exposure in close distance

### System

- Support ONVIF (profile S/profile G), CGI, PSIA, ISAPI protocol.
- Support three streams, and Support 20 channels live view at the same time.
- AF automatic fast focus, maintain focused during zooming
- Smart heater for starting in extra low temperature (-H optional)
- Anti-surge, anti-static, IP67 protection level.

### Interface

- Support standard 128G Micro SD/SDHC/SDXC card storage.
- Support 10M/100M/1000M Ethernet Port.
- Support Audio I/O (-S), support dual channel stereo audio.
- Support Alarm I/O (-S)
- Support CVBS analog output (-S, 4CIF resolution)

### Security

- Support three-level user authentication management, user and password authorization, IP address filtering and anonymous access.
- Support security certificate as HTTPS, SSH; support creating certificate.
- Basic and digest authentication is supportable in IE configuration
- Lock user IP for many times error login


## DS-2CD4A85F-IZ(H)(S) 4K Smart Bullet Camera



### Specification

| <b>Camera</b>               |   |
|-----------------------------|---|
| Image Sensor                | 1/1.7" Progressive Scan CMOS  |
| Min. Illumination           | 0.009 Lux @ (F1.2, AGC ON), 0.012 Lux @ (F1.4, AGC ON), 0 Lux with IR   |
| Shutter Speed               | 1s ~ 1/100,000s   |
| Slow Shutter                | Support   |
| Lens                        | 2.8~12mm @ F1.4, angle of view: 96.0°~32.6°   |
| Lens Mount                  | AF automatic focusing and motorized zoom lens   |
| Auto-iris                   | DC drive  |
| Day & Night                 | IR Cut Filter with auto switch  |
| WDR                         | DWDR  |
| <b>Compression Standard</b> |   |
| Video Compression           | H.264+/H.264/MJPEG  |
| H.264 Type                  | Baseline Profile / Main Profile / High Profile  |
| Video Bit Rate              | 32 Kbps – 16 Mbps   |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2   |
| Audio Bit Rate              | 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)   |
| <b>Image</b>                |   |
| Max. Resolution             | 4096 × 2160   |
| Frame Rate                  | 50Hz: 22fps (4096 × 2160), 25fps (3840 × 2160, 1920 × 1080, 1280 × 720)<br>60Hz: 22fps (4096 × 2160), 24fps (3840 × 2160), 30fps(1920 × 1080, 1280 × 720) |
| Third Stream                | Independent with Main Stream and Sub Stream, up to 50/60Hz: 10fps(1280 × 720)   |
| Image Enhancement           | BLC/3D DNR/ROI/Defog  |
| Image Setting               | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser   |
| Regional Cropping           | Support   |
| Distortion Correction       | Support   |
| Day/Night Switch            | Auto/Schedule/Triggered by Alarm In   |
| Picture Overlay             | LOGO picture can be overlaid on video with 128x128 24bit bmp format   |
| <b>Network</b>              |   |
| Network Storage             | NAS (Support NFS,SMB/CIFS), ANR   |
| Alarm Trigger               | Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception   |
| Protocols                   | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour                     |
| Security                    | User Authentication, Watermark, IP address filtering, Anonymous access  |
| Standard                    | ONVIF(PROFILE S,PROFILE G),PSIA,CGI,ISAPI   |
| <b>Interface</b>            |   |
| Audio (-S)                  | 1-ch 3.5 mm audio in(Mic in/Line in)/out interface  |
| Communication Interface     | 1 RJ45 10M/100M/1000M Ethernet port   |
| Alarm (-S)                  | 1 input, 1 output (up to DC24V 1A or AC110V 500mA )   |
| Video Output (-S)           | 1Vp-p composite output (75 Ω/BNC)   |
| On-board storage            | Built-in Micro SD/SDHC/SDXC slot, up to 128 GB  |
| Reset Button                | Yes   |

## Dimensions

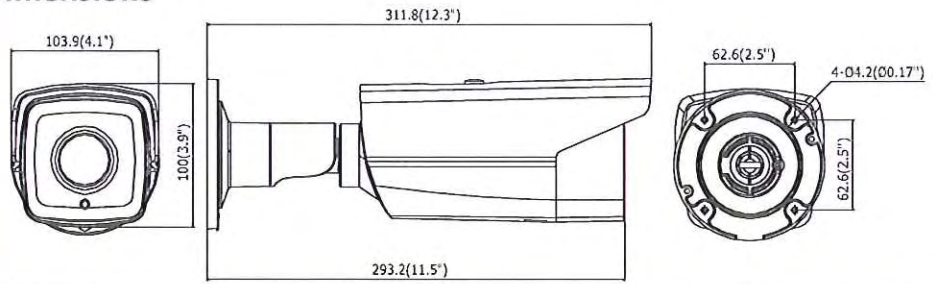

### Audio (-s)

|                             |                                  |
|-----------------------------|----------------------------------|
| Environment Noise Filtering | Support                          |
| Audio I/O                   | Support dual audio track, stereo |
| Audio Sampling Rate         | 16kHz / 32kHz / 44.1kHz / 48kHz  |

### Smart Feature-set

|                         |   |
|-------------------------|---|
| Behavior Analysis       | Line crossing detection, Intrusion detection, Region entrance, Region exiting, Unattended baggage, Object removal |
| Line Crossing Detection | Cross a pre-defined virtual line  |
| Intrusion Detection     | Enter and loiter in a pre-defined virtual region  |
| Region Entrance         | Enter a pre-defined virtual region from the outside place   |
| Region Exiting          | Exit from a pre-defined virtual region  |
| Unattended Baggage      | Objects left over in the pre-defined region such as the baggage, purse, dangerous materials                       |
| Object Removal          | Objects removed from the pre-defined region, such as the exhibits on display.                                     |
| Exception Detections    | Scene change detection, Sudden audio increase/decrease detection, Audio loss detection, Defocus detection         |
| Recognition             | Face detection recognition  |
| Statistics              | Object Counting (Entrance and Exit object number is accounted and showed on screen in real time)                  |

### General

|                      |   |
|----------------------|---|
| Protection Level     | IP67  |
| Operating Conditions | -30°C – 60 °C (-22 °F – 140 °F), Humidity 95% or less (non-condensing); -H: -40°C – 60 °C |
| Power Supply         | 12 V DC ± 10%, PoE (802.3at)  |
| IR Distance          | Up to 50m   |
| Power Consumption    | Max. 12 W   |
| Dimensions           | 100×103.9×311.8 mm (3.94" × 4.09" × 12.28")   |
| Weight               | 2000 g (4.41 lbs)   |

### Order Models

DS-2CD4A85F-IZ, DS-2CD4A85F-IZS, DS-2CD4A85F-IZH, DS-2CD4A85F-IZHS

## GODALMING JOINT BURIAL COMMITTEE

Disclosure by a Member<sup>1</sup> of a disclosable pecuniary interest or a non-pecuniary interest in a matter under consideration at a meeting (S.31 (4) Localism Act 2011 and the Codes of Conduct adopted by Godalming Town Council & Busbridge Parish Council).

As required by the Localism Act 2011 and the adopted Codes of Conduct, **I HEREBY DISCLOSE**, for the information of the authority that I have [a disclosable pecuniary interest]<sup>2</sup> [a non-pecuniary interest]<sup>3</sup> in the following matter:-

**COMMITTEE:**

**DATE:**

**NAME OF COUNCILLOR:** \_\_\_\_\_

Please use the form below to state in which agenda items you have an interest.

| Agenda No. | Subject | Disclosable Pecuniary Interest | Non-Pecuniary Interest | Reason |
|------------|---------|--------------------------------|------------------------|--------|
|            |         |                                |                        |        |
|            |         |                                |                        |        |
|            |         |                                |                        |        |
|            |         |                                |                        |        |
|            |         |                                |                        |        |
|            |         |                                |                        |        |
|            |         |                                |                        |        |
|            |         |                                |                        |        |

**Signed** \_\_\_\_\_

**Dated** \_\_\_\_\_

<sup>1</sup> "Member" includes co-opted member, member of a committee, joint committee or sub-committee

<sup>2</sup> A disclosable pecuniary interest is defined by the Relevant Authorities (Disclosable Pecuniary Interests) regulations 2012/1464 and relate to employment, office, trade, profession or vocation, sponsorship, contracts, beneficial interests in land, licences to occupy land, corporate tenancies and securities

<sup>3</sup> A non-pecuniary interest is defined by Section 5 (4) of the Godalming Members' Code of Conduct.